

CONVOGLIATORI RETTILINEI INCLINATI

INCLINATED RECTILINEAR CONVEYOR

Transfer lineari ad asse di rotazione orizzontale, adatti ad allestimenti a più colori per impieghi con carichi pesanti, dove si richiede un numero di posaggi superiore rispetto alla tipologia dei convogliatori ovali serie MEG. A differenza di quello a cingolo di carro armato, si possono sfruttare tutti i platorelli disponibili, anche quelli della parte sottostante.

This inclined linear conveyor with horizontal rotation axis is available in a wide range configurations. Stepper motor driven and programmable, MEM 30° conveyors can be constructed with a range of pitches between colours and with a flexible number of fixture pallets. They are recommended for high volume applications where additional fixtures are required. MEM 30° conveyors allow for additional linear functions such as post – treatment, pre-treatment, additional print heads, or the installation of pick-and-place load/unload stations with the advantage of more available fixture pallets for a secondary operations. The main difference with MEG model is that all the fixtures can be used, also those in the under part.

Serie MEM 30°


Disponibile in due lunghezze differenti.
Precisione di posizionamento per tutti i modelli: 0,01 mm

*Available in two different lengths.
Positioning precision for all models: 0,01 mm*


DIMENSIONI - SIZE



MEM 30° 144

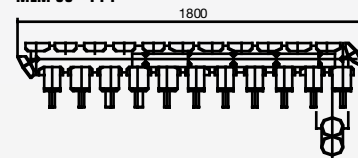

MEM 30° 216

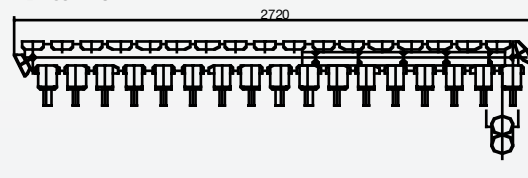

Mod. MEM 30° 144	114/32	152/24	228/16	304/12
N. POSAGGI - NR. OF FIXTURES:	32	24	16	12
PASSO - PITCH:	114,3 mm (4,5")	152,4 mm (6")	228,6 mm (9")	304,8 mm (12")
PESO - WEIGHT:	~ 360 Kg	~ 332 Kg	~ 304 Kg	~ 290 Kg
INSTALLABILE SU - FIXABLE ON:	Logica 200 - 250 - 08			

Mod. MEM 30° 216	114/48	152/36	228/24	304/18
N. POSAGGI - NR. OF FIXTURES:	48	36	24	18
PASSO - PITCH:	114,3 mm (4,5")	152,4 mm (6")	228,6 mm (9")	304,8 mm (12")
PESO - WEIGHT:	~ 510 Kg	~ 468 Kg	~ 426 Kg	~ 405 Kg
INSTALLABILE SU - FIXABLE ON:	Logica 200 - 250 - 08			